
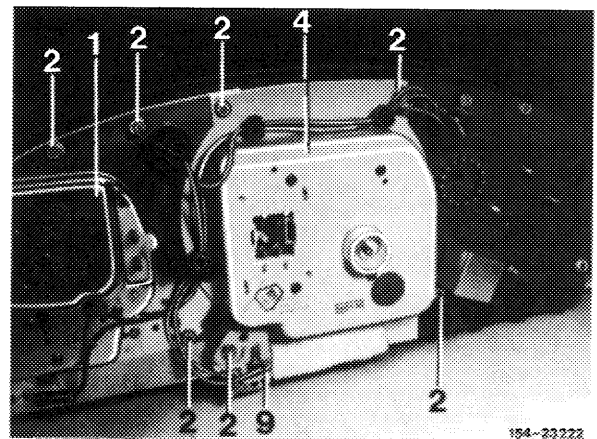


54-259 Removal and installation of revolution counter

Removal

- 1 Remove instrument cluster (54-250).
- 2 Remove tachometer (54-253).
- 3 Loosen fastening screws (2) of lefthand switch plate and remove switch plate with revolution counter.

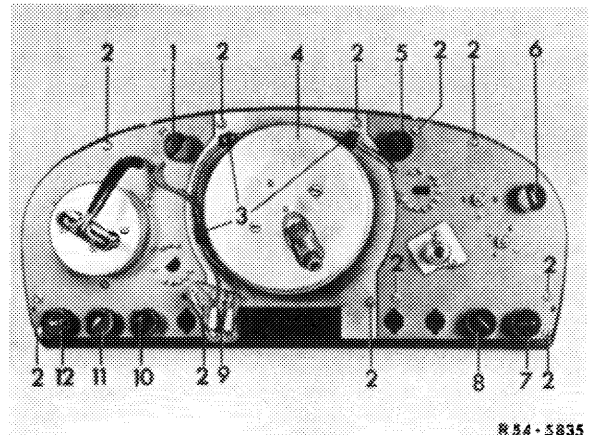

Installation

- 4 For installation proceed vice versa.