Special tool


Clamp for fuel hose



000 589 40 37 00


Removal


- 1 Unscrew protective box.
- 2 Pinch off fuel suction hose (1) with a clamp.
- 3 Pinch off fuel feed hose.



1st version

- 4 Unscrew both fuel hoses on fuel storage reservoir, pinch off leak hose, loosen and pull off.
- 5 Loosen fastening screws (arrow) for clamp and remove fuel storage reservoir.
- 6 For installation proceed vice versa. Make sure of correct connection of fuel hoses. Mount fuel feed hose to center connection of fuel storage reservoir.



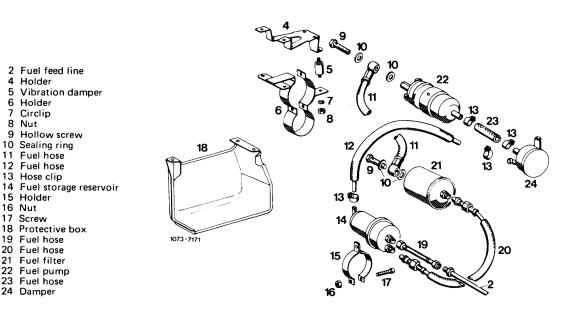

2nd version

- 7 Unscrew fuel line on fuel reservoir, also pinch leak hose, loosen and pull off.
- 8 Loosen fastening screw (arrow) for clamp and remove fuel reservoir.

2 Fuel feed line4 Holder5 Vibration damper6 Holder

Circlip

13 Hose clip

19 Fuel hose 20 Fuel hose 21 Fuel filter 22 Fuel pump 23 Fuel hose

23 Fuel hos 24 Damper

8 Nut
9 Hollow screw
10 Sealing ring
11 Fuel hose
12 Fuel hose

15 Holder 16 Nut 17 Screw 18 Protective box

- 9 For installation proceed vice versa.
- 10 Remove clamp on fuel suction hose.
- 11 Run engine and check for leaks.
- 12 Mount protective box.

