
## Model 126

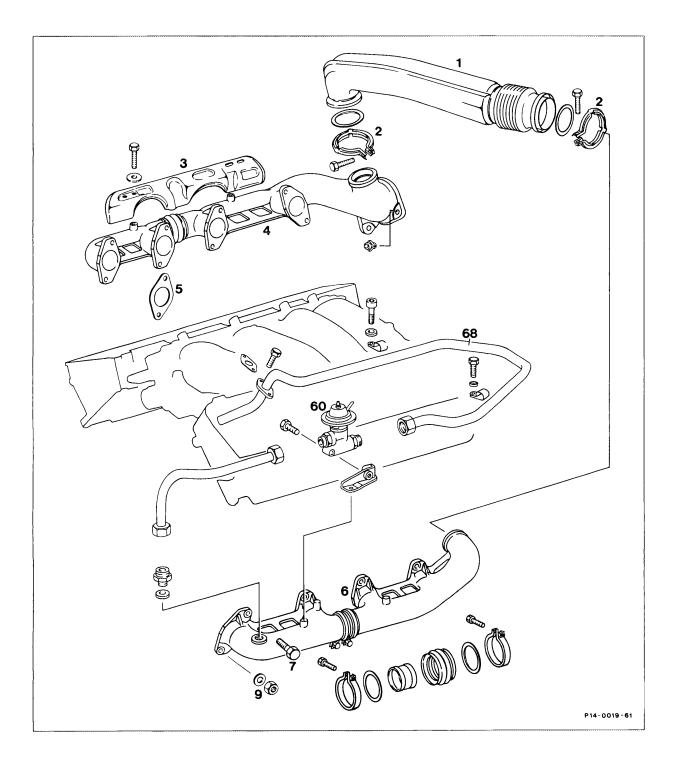

Exhaust system	remove, reinstall (49-100).
Mounting clamp (2) on left exhaust manifold (6)	unscrew, screw on.
Exhaust manifold (4) right	remove, reinstall. Mount with new gaskets (5) metal side facing cylinder head. Observe difference between engine 116 and 117 (see Note 14-470).
Transverse pipe (1)	remove to the right.