
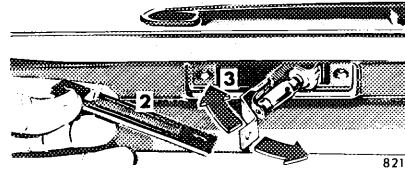


High Mounted Stop Lamp (H2/22.5 W bulb)

To replace the bulb, open trunk lid. Unscrew four nuts, remove lamp housing and gasket, remove bulb.

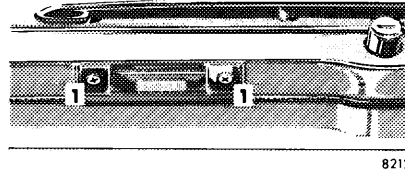

License Plate Lamps (5 W bulb)

Loosen both securing screws (1), detach lens with gasket (2) and pull down lamp holder (3) on the LH side. Replace the bulb. When reinstalling the lens, it must be assured that the protrusion on the lens is on the LH side.

Spark Plugs

This vehicle is equipped with spark plugs as required for driving in the USA. If additional information is desired, your authorized MERCEDES-BENZ dealer will be happy to offer advice (see also rear inside cover of Owner's Manual).