

TO: Mercedes-Benz Dealer Principals, General Managers, Sales Managers, Service Managers, Parts Managers	FROM: Gregory Gunther, Senior Manager, Vehicle Compliance and Analysis, Engineering Services
RE: Emission Service Campaign 2022070004 Launch Notification Replace Braided Hose of Low-Pressure Fuel Line	DATE: October 18, 2024

IMPORTANT NEW EMISSION SERVICE CAMPAIGN INFORMATION

Please note that all customer inquiries should be directed to the Customer Assistance Center at 1-800-FOR-MERCEDES.

Sincerely,

Gregory Gunther

Senior Manager, Vehicle Compliance & Analysis



Emission Service Campaign Launch Notification		October 18, 2024
Campaign No. :	Campaign Desc. :	Replace Braided Hose of Low-Pressure Fuel Line
2022070004	21P0792208	
<p>This is to notify you of an Emission Service Campaign launch to replace the braided hose of the low-pressure fuel line and install a heat shield over the new braided hose on 23,958 Model Year ("MY") 2018-2024 E-Class, S-Class & AMG GT (213, 217, 222, 223 and 290 platforms) vehicles. The affected vehicles were flagged in VMI as "OPEN" on August 12, 2022. An additional 28,234 affected VINs will be flagged in VMI as "OPEN" on October 18, 2024.</p>		
Background		
Issue	Mercedes-Benz AG ("MBAG"), the manufacturer of Mercedes-Benz vehicles, has determined that on certain Model Year ("MY") 2018 - 2024 E-Class, S-Class & AMG GT (213, 217, 222, 223 and 290 platforms) vehicles, the low pressure fuel line does not meet current production specifications. Therefore, it is possible that accelerated aging in the area of connection could occur, resulting in a leak. A risk of fire can be ruled out.	
What We're Doing	MBUSA will conduct an Emission Service Campaign. An authorized Mercedes-Benz dealer will replace the braided hose of low-pressure fuel line and install a heat shield over the new braided hose	
Parts	Parts are available and may be ordered as necessary.	
Vehicles Affected		
Vehicle Model Year(s)	2018-2024	
Vehicle Model	E-Class, S-Class, AMG GT	
Vehicle Population		
Total Campaign Population	23,958 + 28,234 (Supplemental Notice)	
<p>While we regret any inconvenience this may cause, MBUSA is determined to maintain a high level of vehicle quality and customer satisfaction. Please refer all customer inquiries to the Customer Assistance Center at 1-800-FOR-MERCEDES.</p>		



Service Campaign Bulletin



Mercedes-Benz

Campaign No. 2022070004, August 2022

Revision A: 10/18/2024

TO: ALL MERCEDES-BENZ CENTERS

SUBJECT: **Model E-Class, S-Class & AMG GT (213, 217, 222, 223 and 290 platform)
Model Year 2018 - 2024**

Replace Braided Hose of Low-Pressure Fuel Line

Mercedes-Benz AG, the manufacturer of Mercedes-Benz vehicles, has determined that on certain MY 2018-2024 E-Class, S-Class & AMG GT (213, 217, 222, 223 and 290 platform) vehicles, the low-pressure fuel line does not meet current production specifications. Therefore, it is possible that accelerated aging in the area of connection could occur, resulting in a leak. A risk of fire can be ruled out. An authorized Mercedes-Benz dealer will replace the braided hose of low-pressure fuel line and install a heat shield over the new braided hose.

Prior to performing this Campaign:

- **VMI must always be checked before performing campaigns to verify that the campaign is required on a specific vehicle. Always check for any other open campaigns and perform accordingly.**
- Please review the entire Campaign bulletin and follow the repair procedure exactly as described.

Approximately **52,192** vehicles are affected.

Order No. P-SC-2022070004

Service Campaign Bulletin

Service Campaign Bulletin

Service Campaign Bulletin

Service Campaign Bulletin

Service Campaign Bulletin

Replace braided hose of right low-pressure fuel line

Models 213, 217, 222, 223 and 290

Modification note:

- Addition of models 213, 223, and 290, with updated WIS document references.

Work Procedure

1. Remove right air filter housing.

i For basic data, see AR09.10-P-1152***

*** Select WIS document according to vehicle identification number (VIN).

2. Reduce fuel pressure via the service connection.

i For basic data, see AR07.03-P-1460-01***

*** Select WIS document according to vehicle identification number (VIN).

3. Remove bleed line between right cylinder head cover and oil separator (**Figure 1**).

i Sealing ring will be reused.

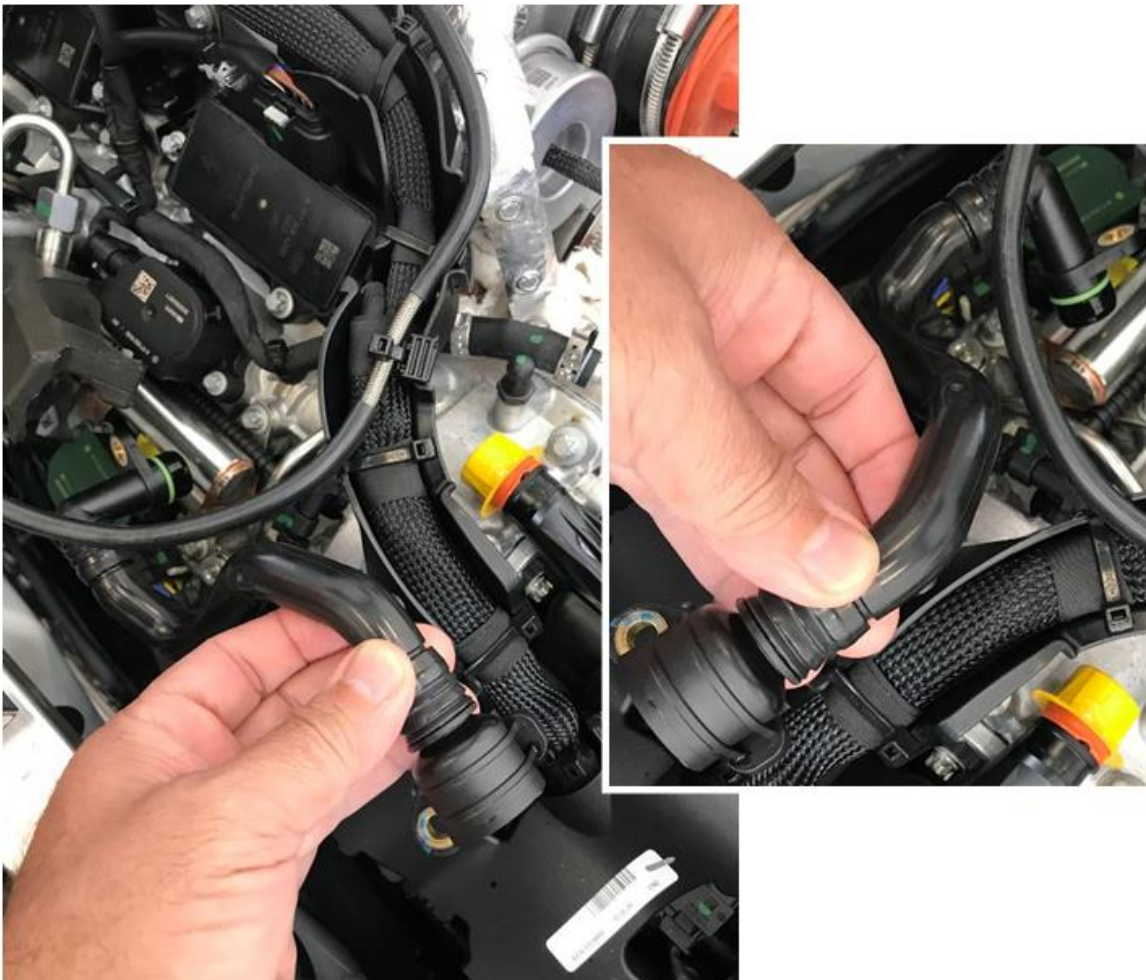


Figure 1

4. Unscrew fastening clamps of low-pressure line (**Figure 2, A**) upstream and downstream of the braided hose.

i The fastening clamps (**Figure 2, A**) should not be removed.



Figure 2

5. Open CLIC clamps on the braided hose and take off (**Figure 3, Left**). Carefully cut through the braided hose along its length and remove from the metal line (**Figure 3, Right**).

i This makes it easier to remove the braided hose from the metal line.

i Cover work environment with a rag so that the remaining fuel is collected.



Figure 3

6. Slide on new braided hose, position, and fasten with new CLIC clamps.

i Slide CLIC clamps onto line before the fabric hose.

i Position braided hose on metal line based on markings (**Figure 4, A**).

i Metal lines must not be bent during assembly!

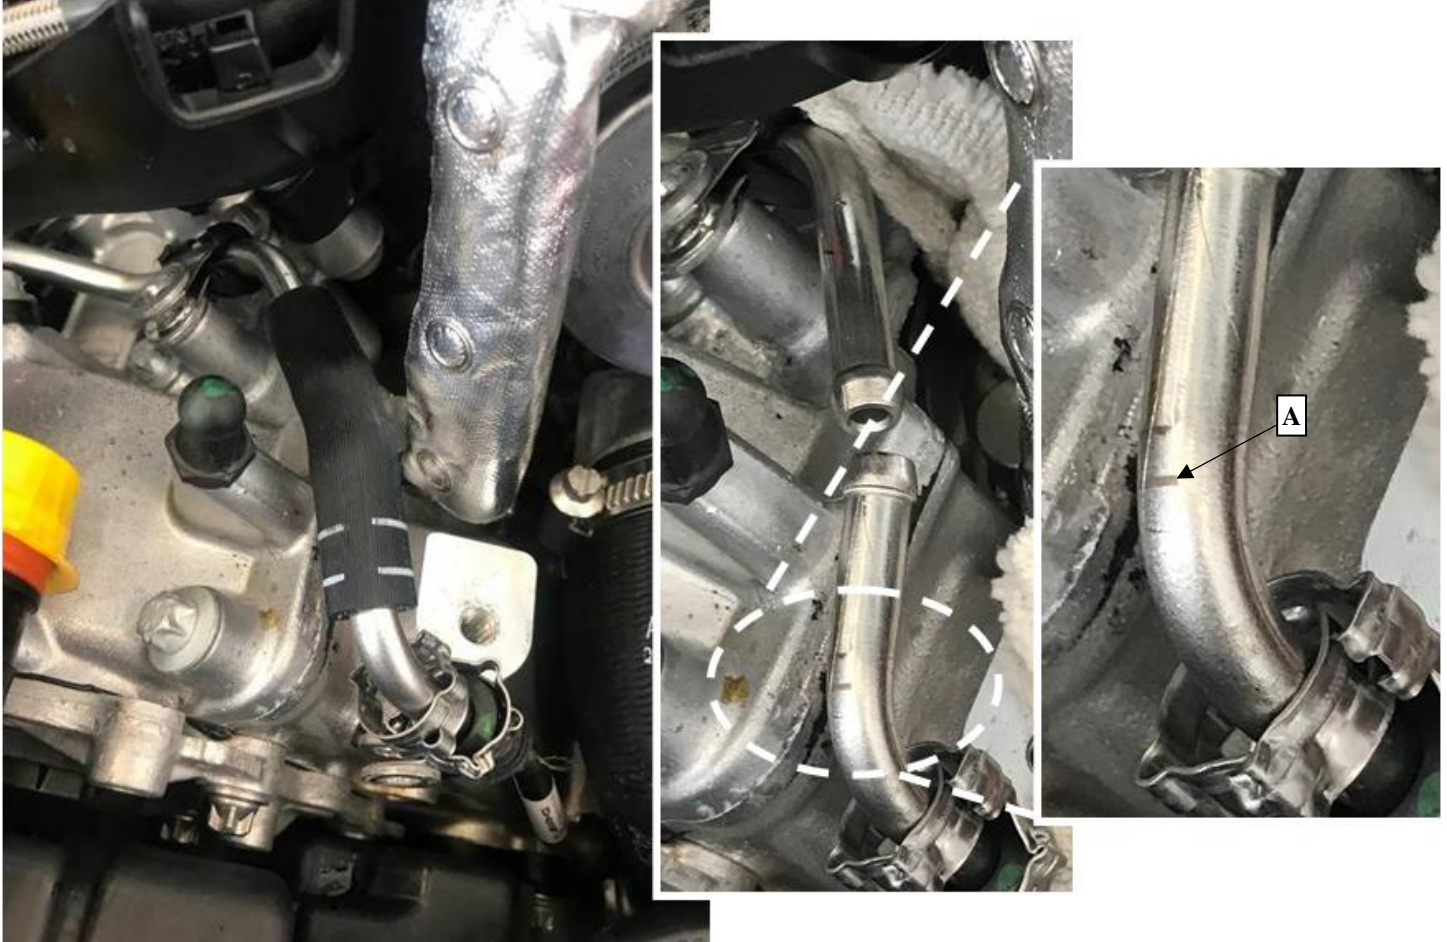


Figure 4

7. Install heat shield over the new braided hose.

i Close snap fasteners.



Figure 5

8. Assemble in reverse order.

Primary Parts Information

Qty.	Part Name	Part Number
2	Hose clamp	A 000 995 60 10
1	Fuel hose	A 177 070 31 00
1	Heat shield	A 177 096 05 00

i **Note:** The following allowable labor operation should be used when submitting a warranty claim for this repair:

Warranty Information

Damage Code	Operation Number	Description	Labor Time (hrs.)
07 922 08	02-0900	Replace hose of right fuel line in low-pressure fuel circuit	0.9

i **Note:** Always check Xentry Operation Time (XOT) for the current OP-Code times. Labor times are subject to change and updates may not be reflected in this document.